



LED薄型反射式环状照明

LED的光横向射出，经特殊的反射处理，实现薄形至近距离照明。

型号	尺寸 (mm)			LED数	供电规格	WD	外观图
	外寸	内径	厚度				
LRR-26/26-8R	26×26	8	3	18	DC12V 0.035A	5~13	图1
LRR-26/26-8□	26×26	8	3	18	DC12V 0.07A	5~13	图1
LRR-28/28-11R	28×28	11	3	18	DC12V 0.035A	3~8	图2
LRR-28/28-11□	28×28	11	3	18	DC12V 0.07A	3~8	图2
LRR-26/33-8R	26×33	8	4	18	DC12V 0.035A	5~13	图3
LRR-26/33-8□	26×33	8	4	18	DC12V 0.07A	5~13	图3
LRR-34/34-8R	34×34	8	5	18	DC12V 0.06A	5~10	图4
LRR-34/34-8□	34×34	8	5	18	DC12V 0.12A	5~10	图4

□用于表示颜色、R=红、G=绿、B=蓝、W=白 其他 尺寸·IR/UV、请商榷

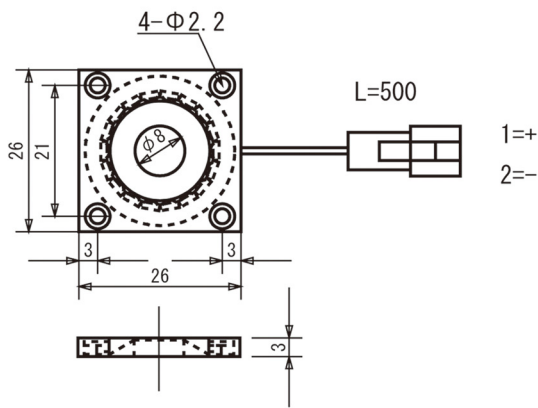


图1

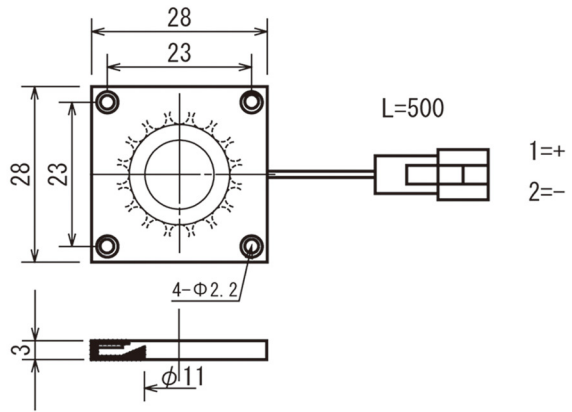


图2

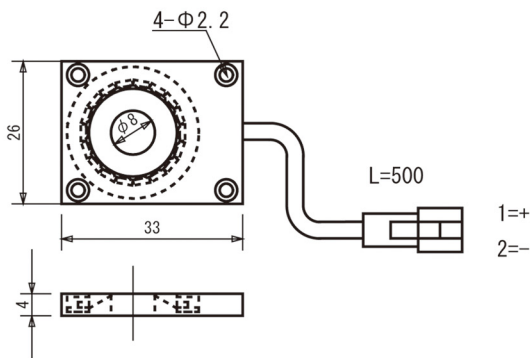


图3

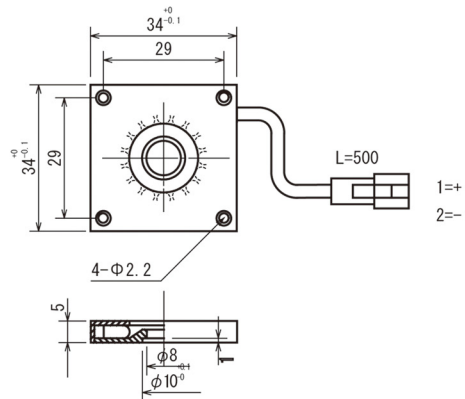


图4

